

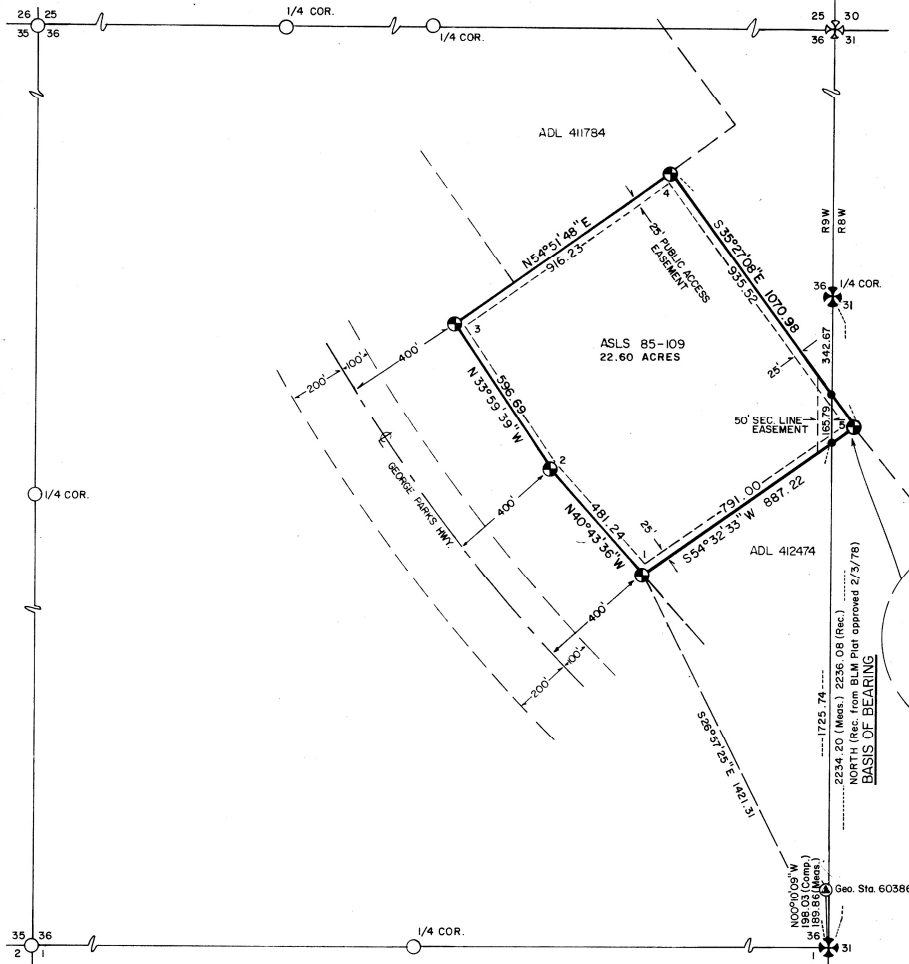


ALASKA STATE LAND SURVEY NO. 85-109
 Plat #87-7
 Sec. 36 T9S R9W & Sec. 31 T9S R8W FM
 Nenana
 9/28/88
 ALASKA STATE LAND SURVEY #85-109
 Plat #87-7
 Sec. 36 T9S R9W & Ptn. Sec. 31 T9S R8W FM
 Nenana
 5/26/87

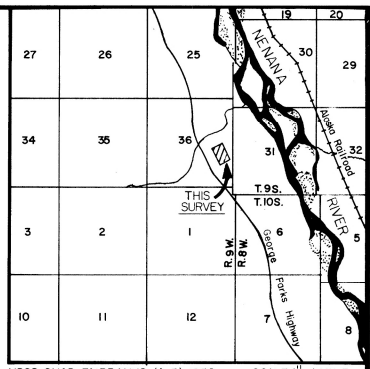

NOTES

- All parcels on lands owned by the State of Alaska, located within 50.00 feet of, or bisected by a surveyed section line, are subject to a 50 foot easement, each side of the section line, which is reserved to the State of Alaska for public highways under AS 19.10.010.
- The existing claimants corners were recovered and used to control the location of the Tract boundaries.
- This survey was accomplished in accordance with Homestead Entry S.L. 85-109 and AS 38.09.010 - 38.09.090 (SLA 1983, AM 1984).
- The minimum closure of the Tract boundary and the minimum accuracy of the field surveyed tie to the Basis of Coordinates, as field monumented, exceeds 1:5,000.
- All bearings shown are true bearings as oriented to the Basis of Bearing, and distances shown are reduced to horizontal field distances.
- Range line between Sections 36 and 31 and Section 31 surveyed by BLM in 1917, rectangular survey Township 9 South, Range 8 West, Fairbanks Meridian, survey approved 10/9/19.
- S.E. corner of Section 36 set by BLM in 1966, exterior boundary survey of Tract A, Township 9 South, Range 9 West, Fairbanks Meridian, survey approved 2/3/78.
- South, west and north lines of Section 36, surveyed by Stutzmann Engineering in 1972, Supplemental Cadastral Survey Township 9 South, Range 9 West, Fairbanks Meridian, survey filed 4/26/73, Nenana Recording District, plat number 73-110.



USGS QUAD. FAIRBANKS (A-5) 1950
 SCALE: 1" = 1 MILE

CERTIFICATE OF OWNERSHIP AND DEDICATION

I, the undersigned, hereby certify that I am the Director, Division of Land & Water Management, and that the State of Alaska is owner of ASLS 85-109, as shown hereon. I hereby approve this survey and plat for the State of Alaska, and dedicate for public or private use as noted, all easements, public utility areas, and rights-of-way as shown and described hereon.

MAY 5, 1987
 Date
 Director, Division of Land & Water Management

NOTARY'S ACKNOWLEDGEMENT

Subscribed and sworn to before me this 5th day of May, 1987 for Richard A. Leeborn
 Notary for the State of Alaska
 My Commission Expires 12-10-88

PERMITTEE CERTIFICATE

I, the undersigned, hereby certify that I am the permittee as shown hereon. I hereby approve this survey and plat.

ADL No. 411781
 David A. Lieberman
 Date

NOTARY'S ACKNOWLEDGEMENT


Subscribed and sworn to before me this 11th day of March, 1987 for Nancy Trump
 Notary for the State of Alaska
 My Commission Expires 6/14/90

SURVEYOR'S CERTIFICATE

I hereby certify that I am properly registered and licensed to practice land surveying in the State of Alaska, that this plat represents a survey made by me or under my direct supervision, that the monuments shown hereon actually exist as described, and that all dimensions and other details are correct.

Date 3/12/81
 Mac A. Stevens Reg No. 3796-S
 Registered Land Surveyor

AMENDED PLAT



**NENANA RECORDING DISTRICT
 SELECTION INFORMATION**

T9S, R8W
 General Selection 24
 Tentative Approval dated 10-1-62
 Patent No. 1232740 dated 7-29-63
 T9S, R9W
 General Selection 688
 Tentative Approval dated 5-4-64

88-31
 RECORDED - FILED NC
 NENANA REC. DIST.
 DATE 9-28-88
 TIME 9:30 AM
 AS/DLY FM
 DAVE POT
 ADDRESS

5-26-87
 2-22
 AS/DLY FM
 DAVE POT
 FBKS.

REVISIONS

Date	Correction	Checked
6/87	Corrected bearings & distances around tract boundary and tie to Basis of Bearing. Moved intersection monuments on to Range line.	ML

MONUMENT ACCESSORIES

COR-1	C-1	BT-1	5" SPRUCE	S79°05'E	29.7'
		BT-2	5" SPRUCE	S44°45'E	7.3'
		BT-3	9" BIRCH	S35°15'E	10.3'
COR-2	C-2	BT-1	4" SPRUCE	S80°15'E	6.4'
		BT-2	5" SPRUCE	S9°45'W	23.8'
		BT-3	3" SPRUCE	S81°30'W	10.1'
COR-3	C-3	BT-1	3" SPRUCE	N21°15'W	13.2'
		BT-2	3" SPRUCE	S62°15'E	19.4'
		BT-3	4" SPRUCE	S13°45'W	9.1'
COR-4	C-4	BT-1	6" SPRUCE	N8°59'E	12.1'
		BT-2	5" SPRUCE	S50°57'E	19.9'
		BT-3	3" SPRUCE	S22°13'E	11.8'
COR-5	C-5	R.P.-1	#5 REBAR w/2" AL CAP	N36°01'45'W	10.0'
		R.P.-2	#5 REBAR w/2" AL CAP	S54°01'50'W	10.0'

- LEGEND**
- BLM Primary Monument Recovered
 - Existing BLM Primary Monument Not Recovered
 - Existing ADL Primary Monument, Not Recovered
 - Set 2-1/2" x 30" Al. Pipe w/3-1/4" Al. Cap
 - Geodetic Control Monument Recovered
 - Lines Surveyed
 - Unsurveyed
 - (Meas) Measured
 - (C) Computed
 - Rebar w/Cap Set This Survey

Date of Survey: 6/8/85
 Beginning: 6/8/85
 Ending: 6/17/86

Surveyor: Mac A. Stevens
 PO Box 74
 Talkeetna, Alaska 99676

STATE OF ALASKA
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF LAND & WATER MANAGEMENT
 Anchorage, Alaska

ALASKA STATE LAND SURVEY No. 85-109
 WITHIN
 SURVEYED SEC. 36, TRACT-A, T9S., R.9W., FM., ALASKA
 SURVEYED SEC. 31, T9S., R.8W., FM., ALASKA

Drawn By: JAR
 Date: 7/85

Approval Recommended: [Signature]
 Date: 5/3/87

Checked: [Signature]
 Date: [Signature]

SCALE: 1" = 300'

FILE NO. 85-109

MAC A. STEVENS DIV OF LAND & WATER MGT
REGISTERED LAND SURVEYOR FAIRBANKS
P. O. BOX 74
TALKEETNA, ALASKA 99676
(907) 733-2281

88 SEP 12 AM 11:58

SURVEYOR'S AFFIDAVIT RECEIVED

Plat title, ASLS 85-109

The above referenced subdivision plat as filed in the Nenana Recording District under Plat file number 87-7 has been revised as follows:

Corrected Bearings and Distances around tract boundary and to the Basis of Bearing. Show correct location of section line intersection monuments.

The above revision constitutes the sole change made to the plat aside from its notation in the revision block on the plat. The above revision does not influence any change of, ownership, drainage features, right-of-way or any other item which would adversely affect this or adjacent properties. I am therefore submitting this plat for refiling as corrected.


Date 4-20-88

Registration Number 3796-S

Mac A. Stevens

Registered Land Surveyor

88-31

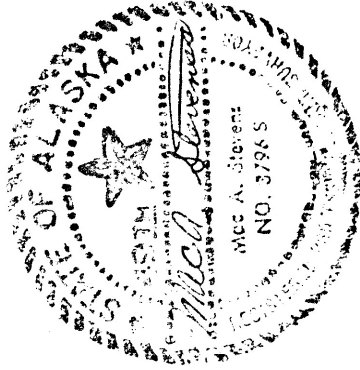

RECORDED - FILED NC	
NENANA REC. DIST.	
DATE	9-28 1988
TIME	9:20 A M
Requested by	AS/DNR
Address	DAVE POT